


all measurements in cm

All blue marked components are required on site or options.

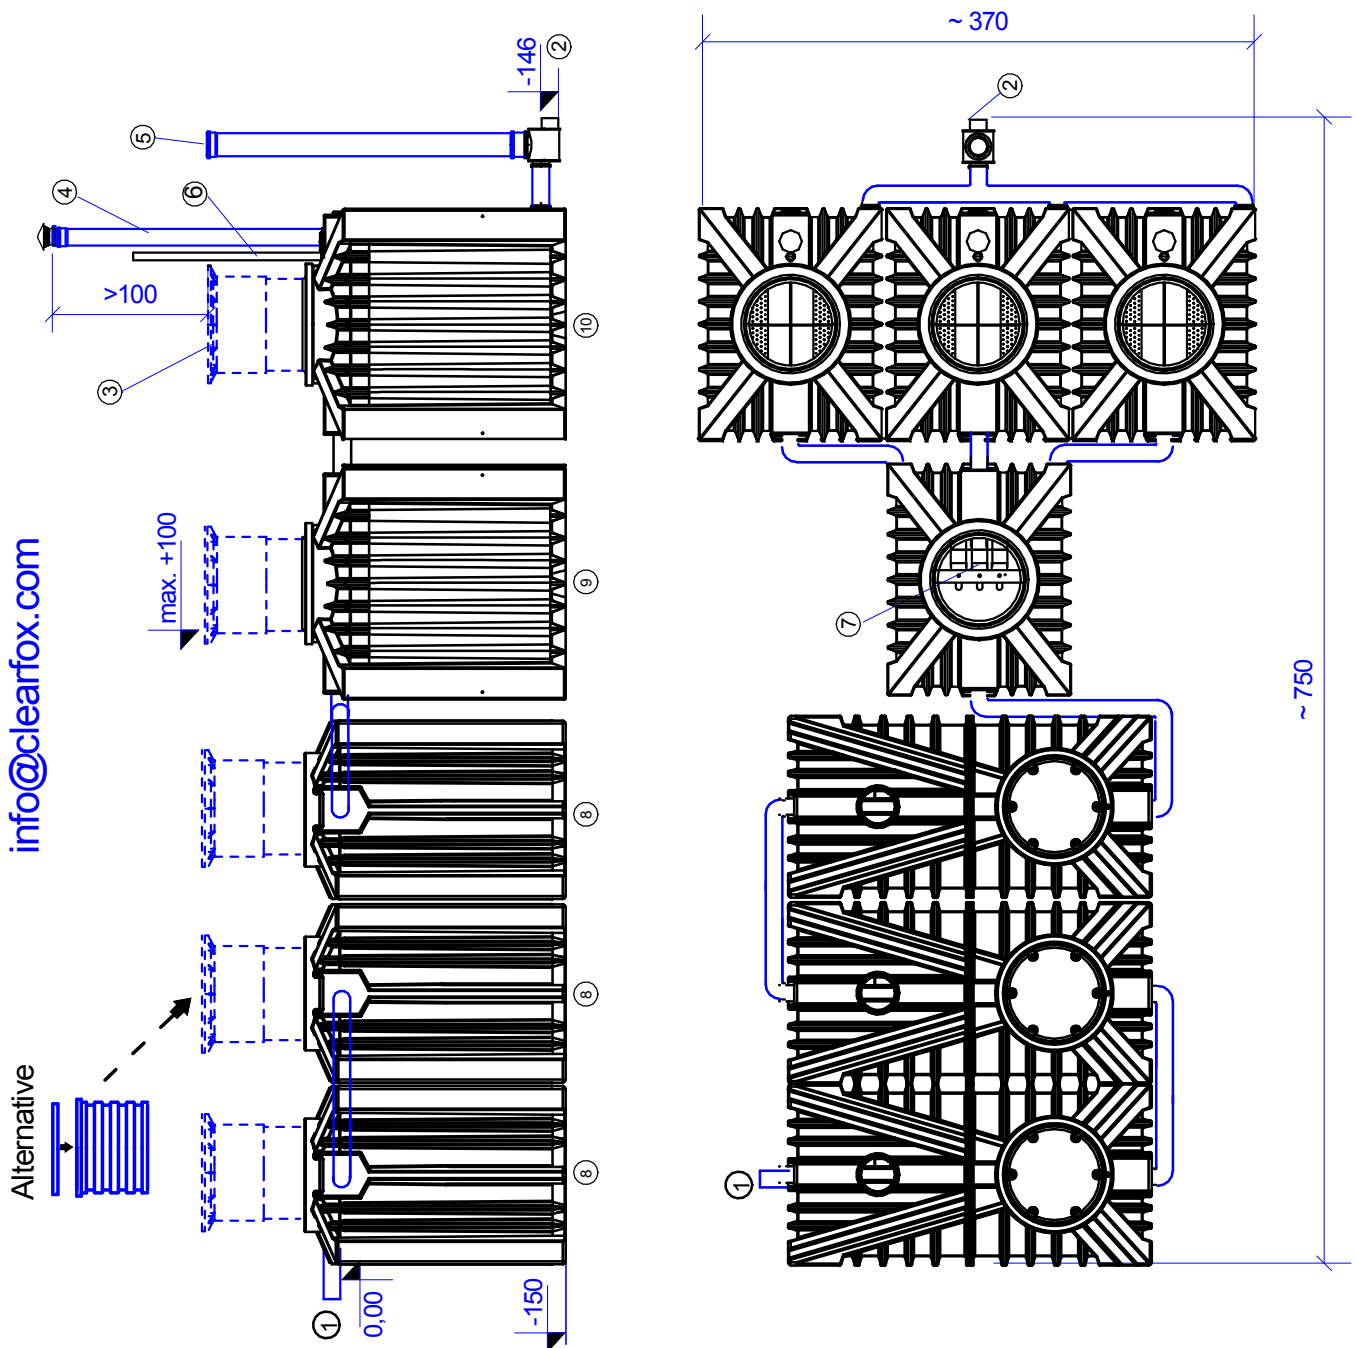

info@clearfox.com

Alternative

- 1. Inlet 110mm (Mat. PVC/PE)
- 2. Outlet gravity 110mm (Mat. PVC/PE)
- 3. Ventilated lid (Mat. PE)
- 4. Aeration pipe inlet 110mm (Mat. PVC/PE)
- 5. Sampling shaft DN 150 (Mat. PVC / PE)
- 6. Alarm (Indicator for water backflow)
- 7. Triple restriction valve (must be adjusted to same level!)
- 8. Buffer/prechamber tank 3500L (Mat. PE)
- 9. Distribution tank 2250L (Mat. PE)
- 10. Biological reactor 2250L (Mat. PE)

Note 1:
The plan view of the tank configuration is an example;
in compliance with the hydraulic connections, the layout can be changed suit to the site conditions.

Note 2:
In case that effluent must be lifted, please replace the sampling chamber with a pumping station.

Series 24 p.e.
outlet by gravity

www.clearfox.com



Small wwtp
ClearFox- nature 24p.e.

		M1:50
Datum: 22.09.2016	DIN A4	gez.: mz