

Specification:

Population range: 4-6 persons

Measures: 153 x 122 x 220 cm(l,w,h) (standard variant,complete height with aeration scoop)

Sludge treatment: stabilizing, volumereduction


Max. organic loading: 240-300g BOD/day

Max. average daily flow: 900 l

Max. blower power consumption: 0,08 kW

Weight (total/plug&play): ~160 kg

Total capacity: 2250 l

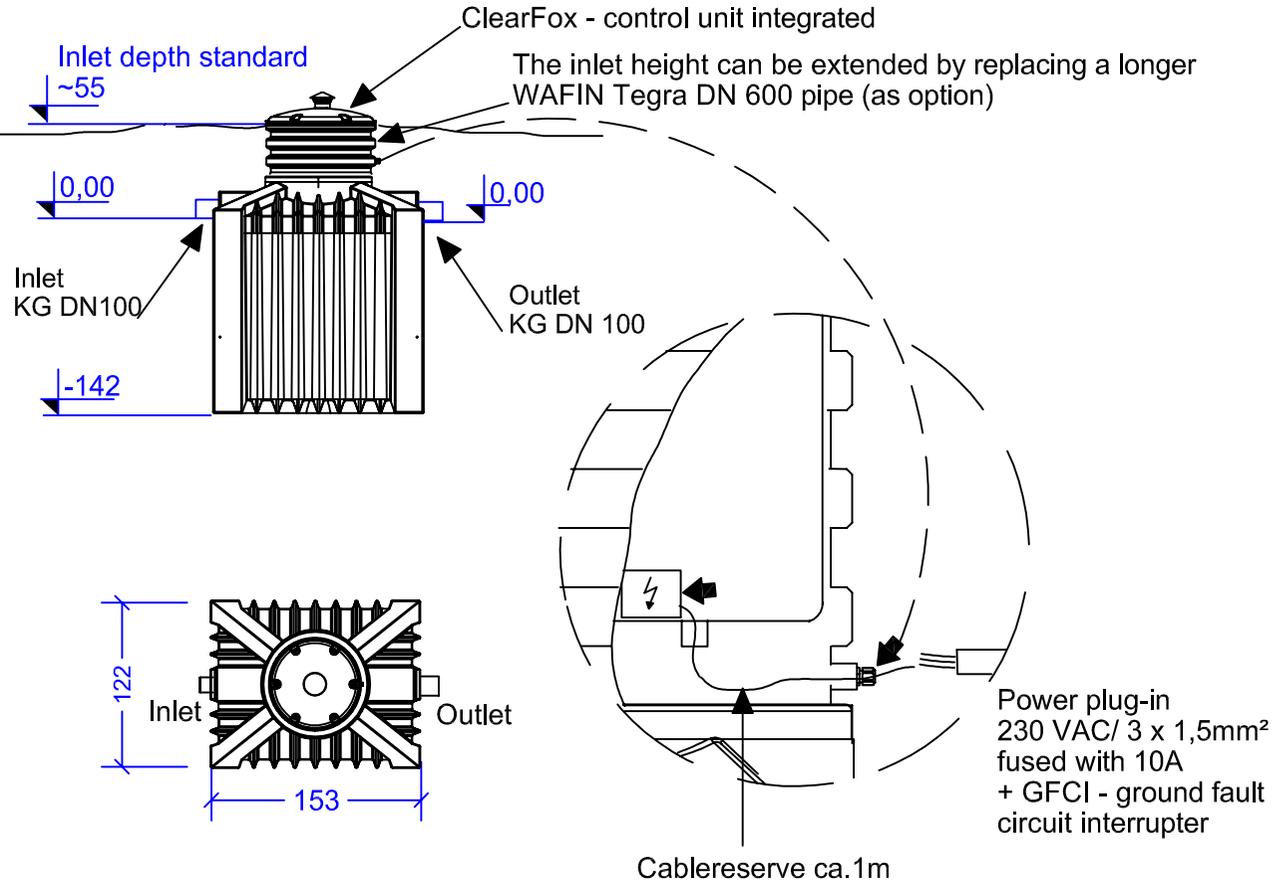

ClearFox - QuickONE+
small wwtp 4-6 p.e.
Single chamber SBR system

Specification:

Population range: 6 persons

Measures: 243 x 122 x 220 cm (l,w,h) (standard variant, complete height with aeration scoop)

Sludge treatment: stabilizing, volumereduction


Max. organic loading: 360g BOD/Day

Max. average daily flow: 900 L

Max. blower power consumption: 0,08 kw

Weight (total/plug&play): ~180 kg


Total capacity: 3.500 L

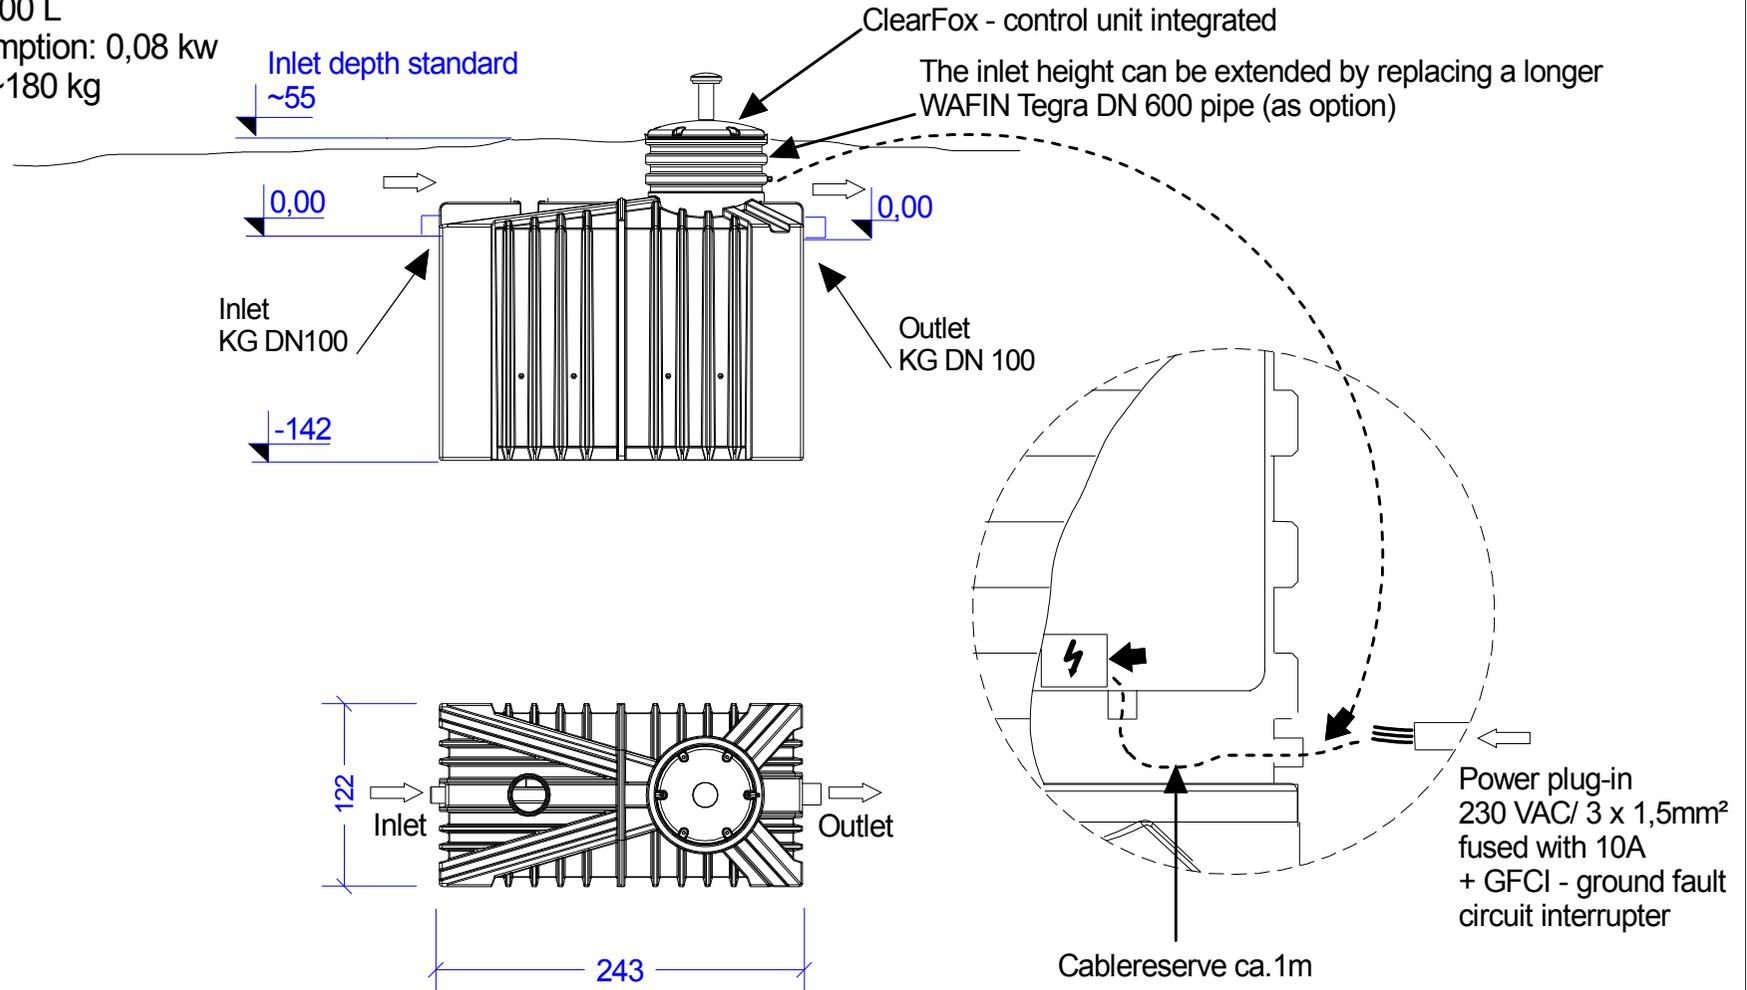

all measures in cm

ClearFox- QuickONE +
small wwtp 6 p.e.
Single chamber SBR system
according EN 12566-3

all measures in cm

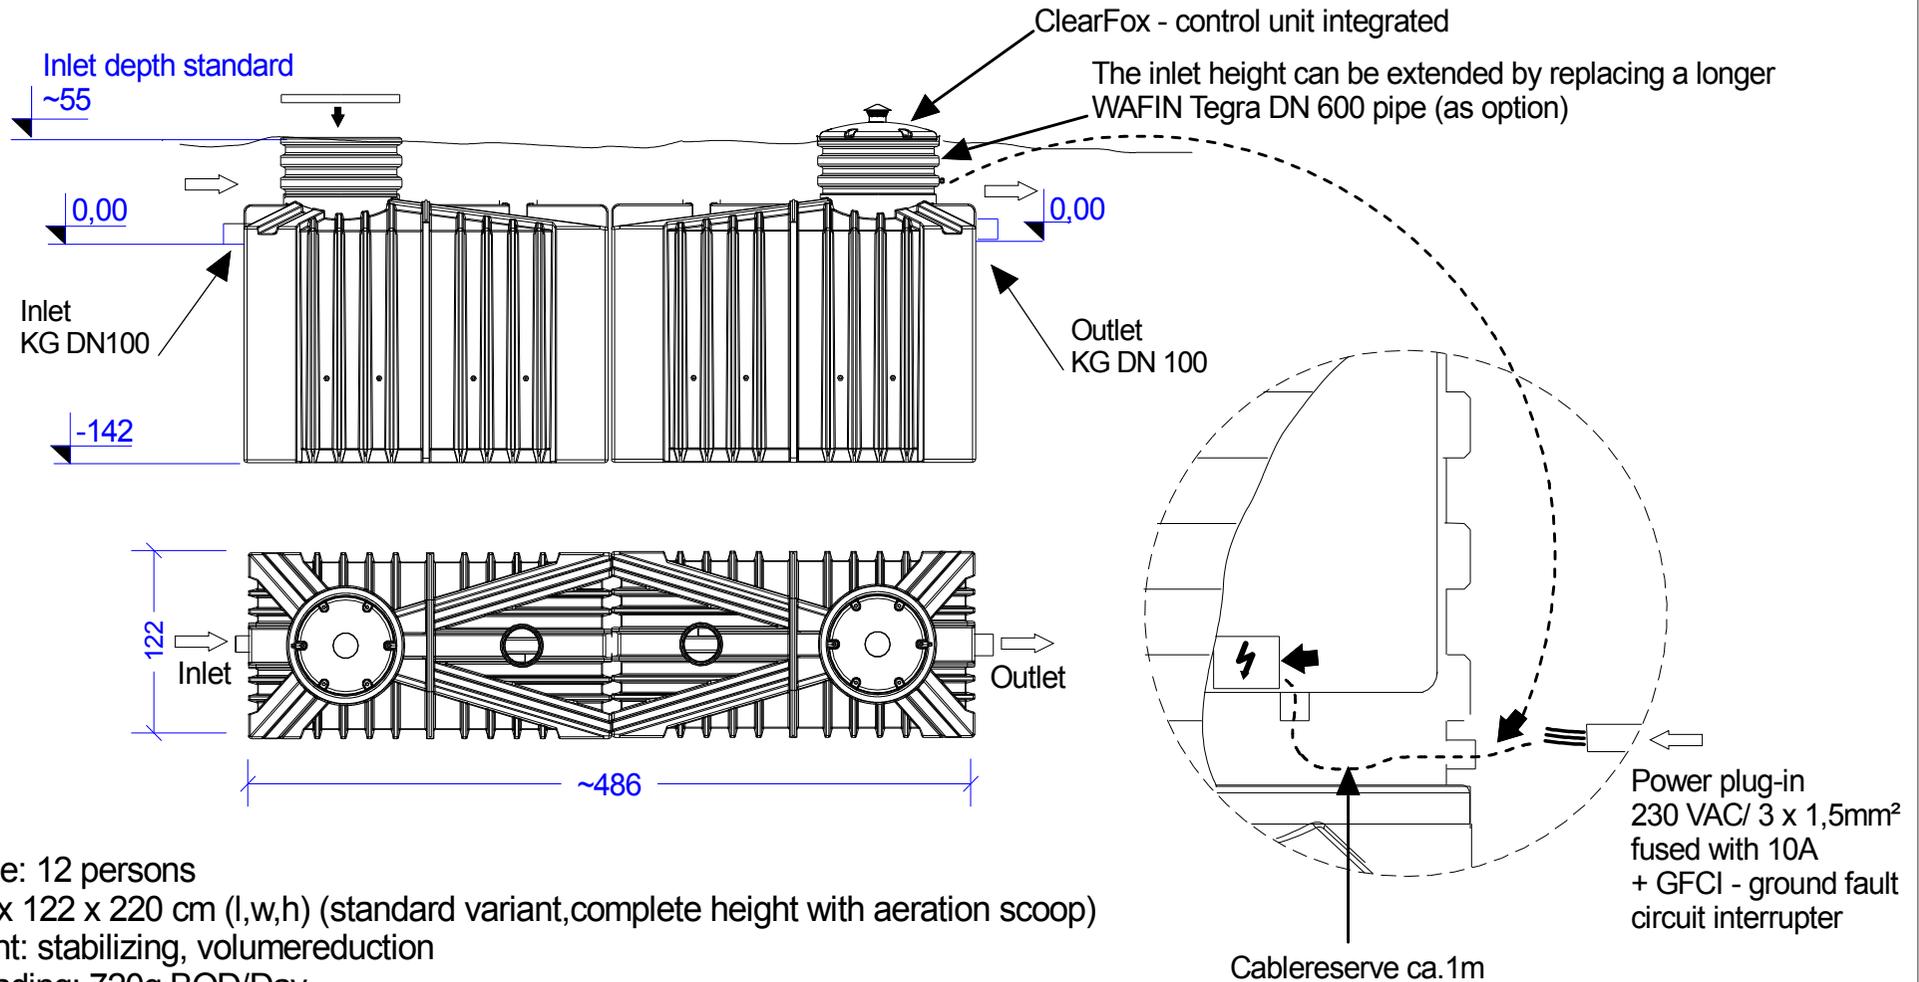


Specification:

Population range: 12 persons
 Measures: 486 x 122 x 220 cm (l,w,h) (standard variant, complete height with aeration scoop)
 Sludge treatment: stabilizing, volumereduction
 Max. organic loading: 720g BOD/Day
 Max. average daily flow: 1800 L
 Max. blower power consumption: 0,15 kw
 Weight (total/plug&play): ~360 kg
 Total capacity: 7000 L

ClearFox- QuickONE +
 small wwtp 12 p.e.
 Single chamber SBR system
 according EN 12566-3

all measures in cm

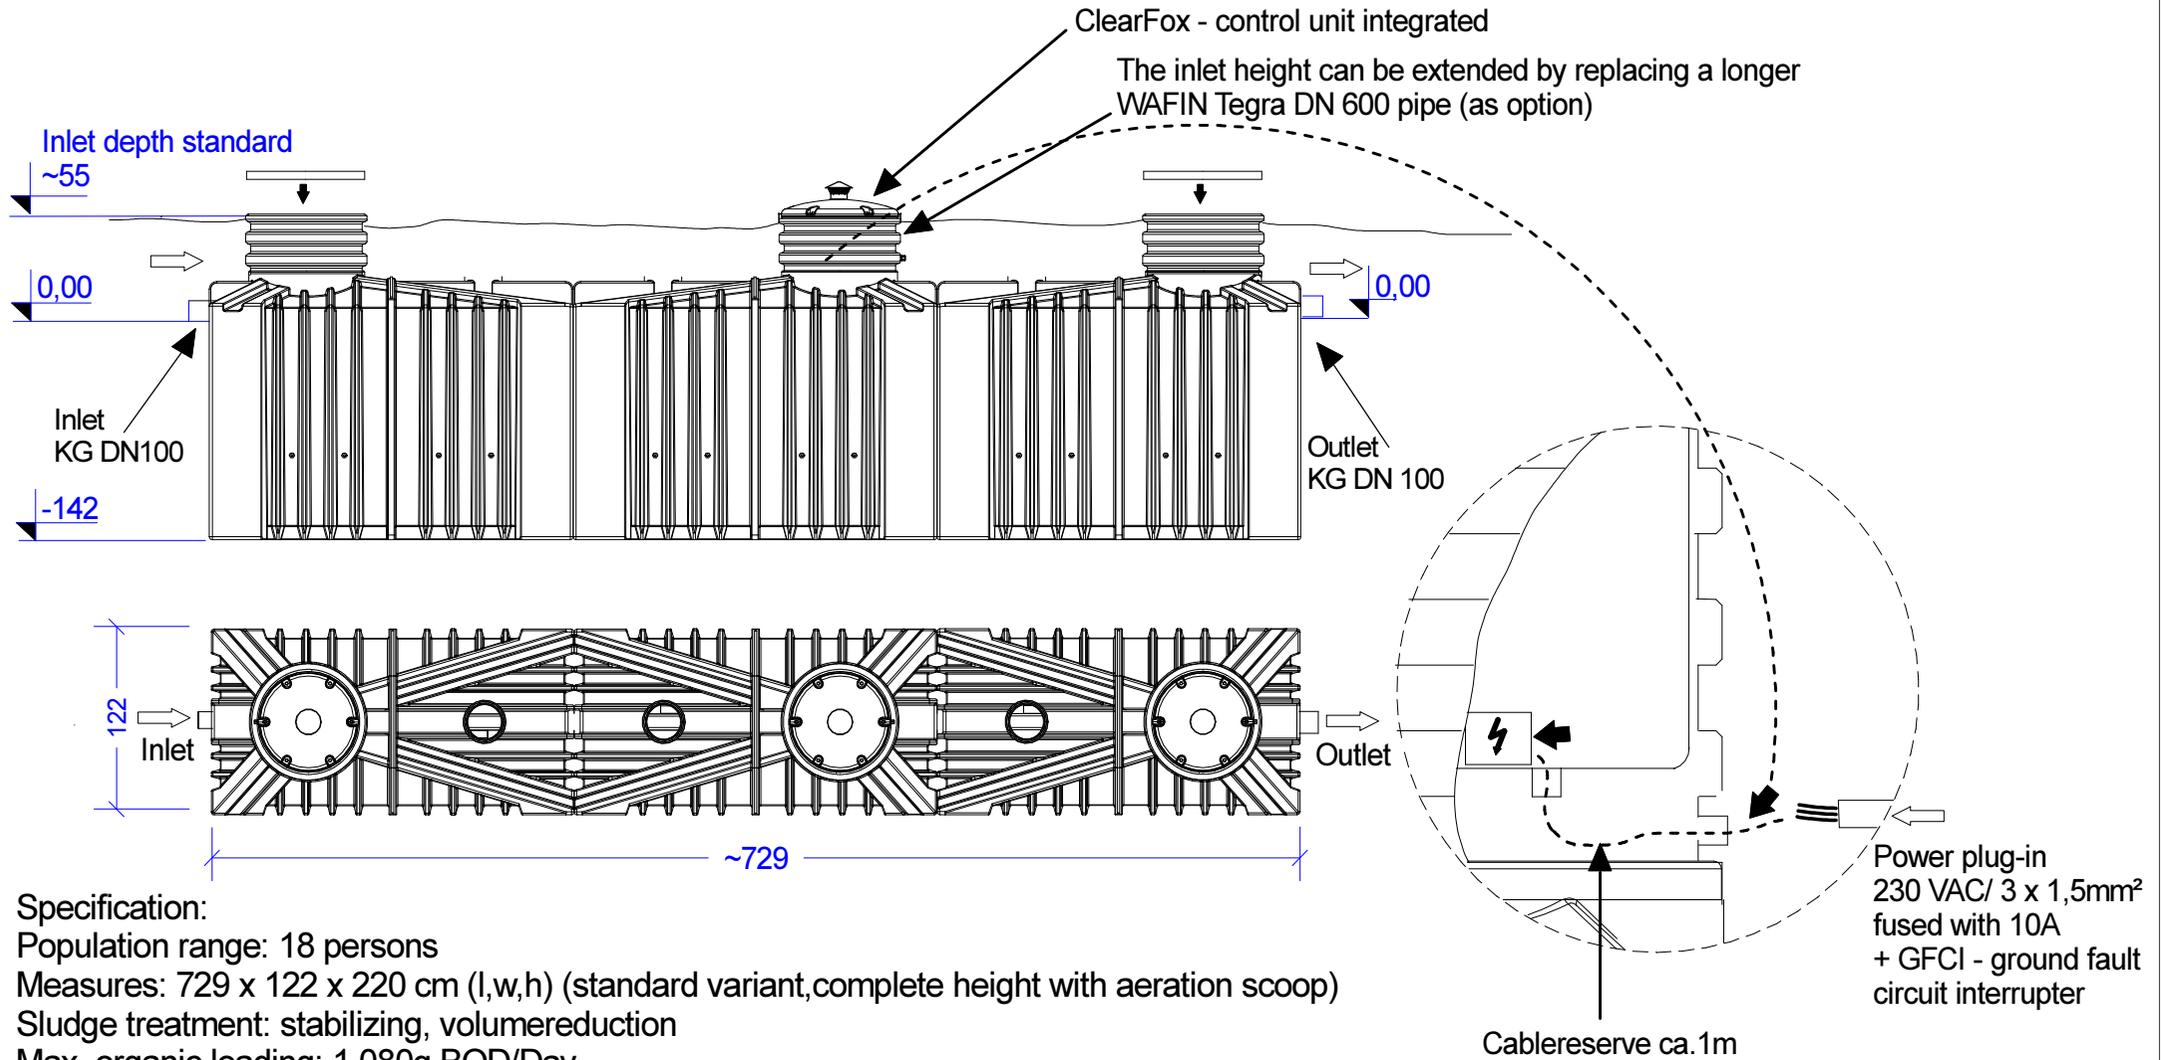


Specification:

- Population range: 18 persons
- Measures: 729 x 122 x 220 cm (l,w,h) (standard variant, complete height with aeration scoop)
- Sludge treatment: stabilizing, volumereduction
- Max. organic loading: 1.080g BOD/Day
- Max. average daily flow: 2.700 L
- Max. blower power consumption: 0,25 kw
- Weight (total/plug&play): ~540 kg
- Total capacity: 10.500 L

ClearFox- QuickONE +
 small wwwtp 18 p.e.
 Single chamber SBR system
 according EN 12566-3

all measures in cm

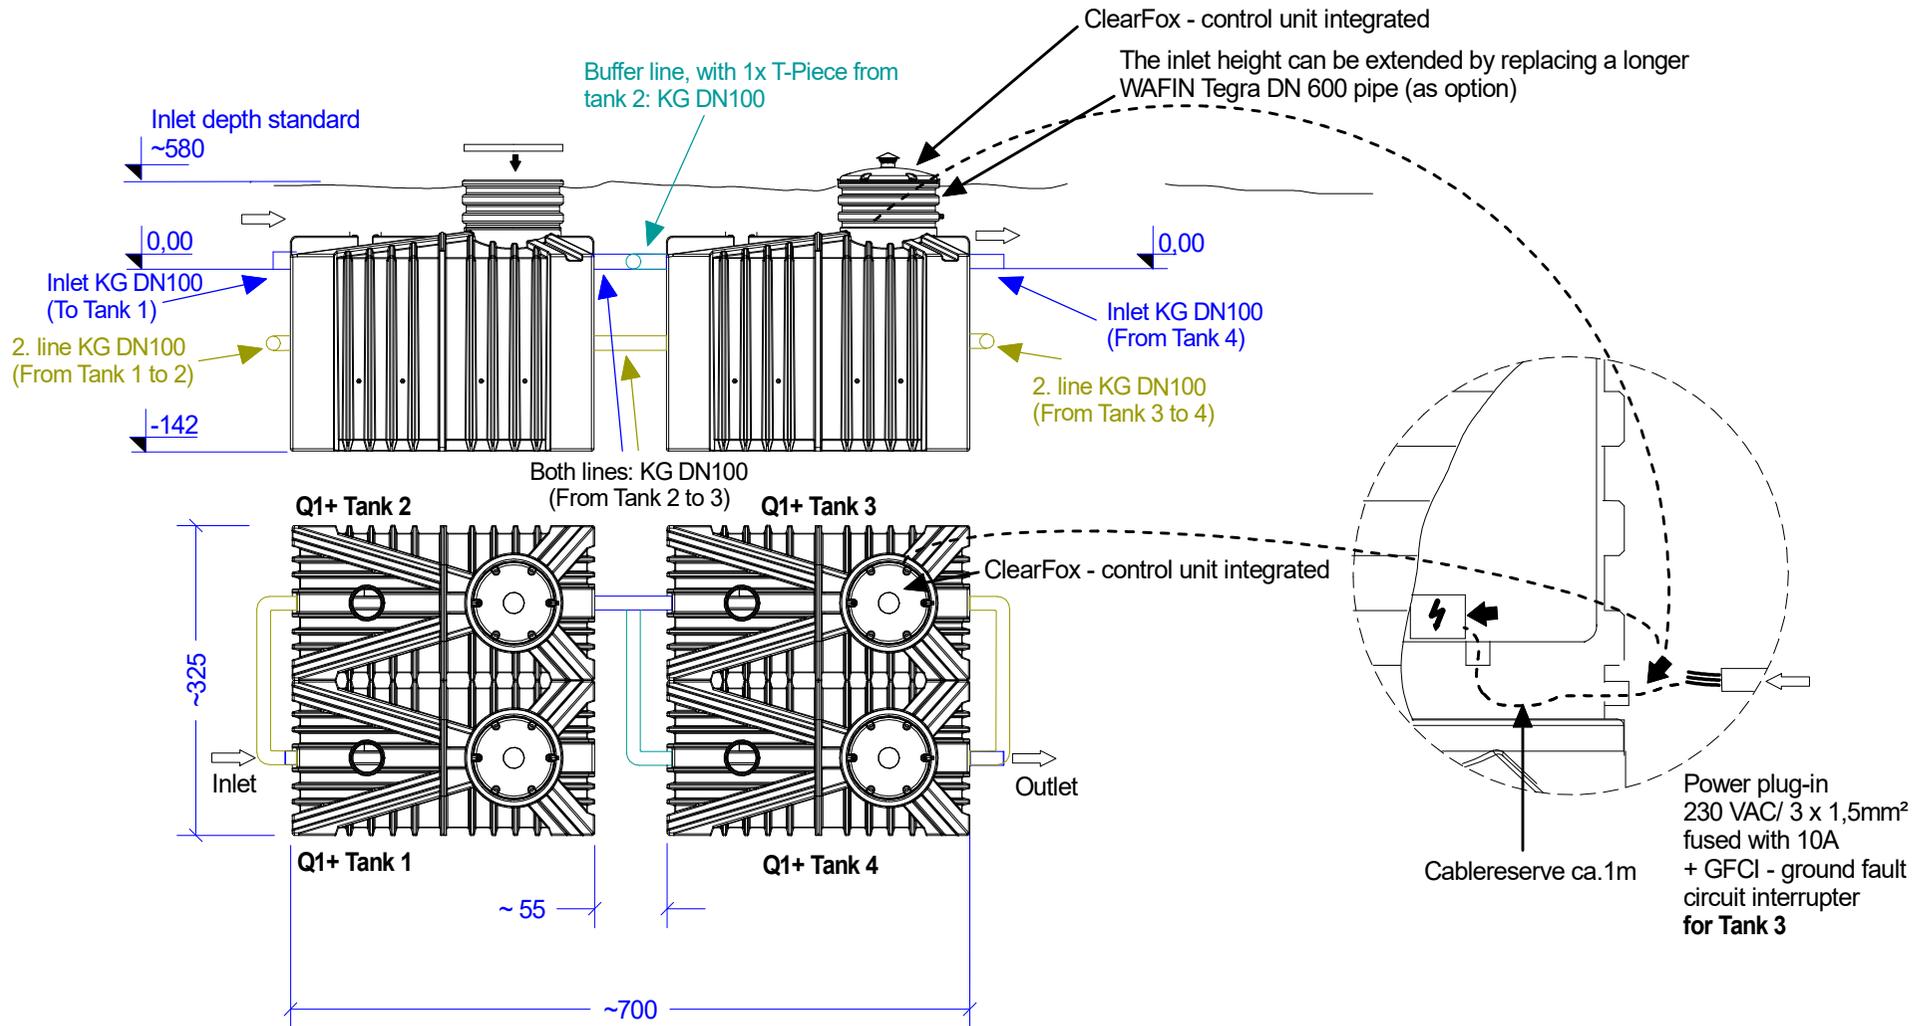

Specification:

Population range: 24 persons (with subsidiary flow buffer)

Measures: 700 x 325 x 220 cm (l,w,h)

Max. organic loading: 1.440g BOD/Day

Max. average daily flow: 3.600 L

Weight (total/plug&play): ~720 kg including subsidiary flow buffer

Total capacity: 14.000 L

ClearFox- QuickONE +
small wwtp 24 p.e.
Single chamber SBR system
according EN 12566-3